


PVC HOSE WITH ELECTRIC WIRE

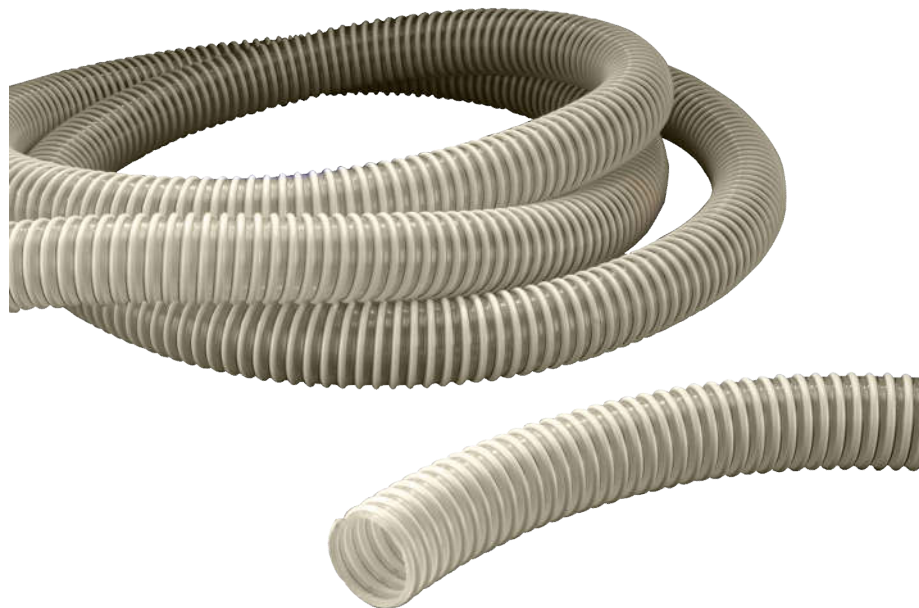

TUBE:

- PVC

REINFORCEMENT:

- Hard PVC, Copper Grounding Wire

COVER:

- PVC

TEMP RANGE:

- -10 °C App. to +70 °C App
- Short time to +80 °C App..

APPLICATIONS:

- Ideally as Suction & Transport Hose for Abrasive Solids such as Dust, Powders, Wood Chip, Granulates, Oil & Fuel.
- For Gaseous & Liquid Media
- For Industrial Vacuum Cleaners, Granulate Conveying Systems, Printing Machines, Blowers & Compressors as Robust Protection Hose.

PROPERTIES:

- Heavy Model
- Smooth Interior
- Increases Pressure & Vacuum Resistance
- Flame-Retardant Acc to UL94-HB
- High Axial Strength
- Good Resistance to Chemicals
- Good Resistance to UV & Ozone
- Gas & Liquid Tight
- Capable of Electro Static Discharge by Grounding the Spiral.

STANDARD COLOUR:

- Transparent

MARKING ON THE HOSE:

NA



| ITEM | ID | OD | WALL | | WORKING | | BURSTING | | BENDING | STANDARD | | VACCUM | EX-STOCK | MOQ |
|-----------|-------|-------|----------|----|----------|-----|----------|-----|---------|----------|--------|--------|----------|-----|
| | | | THICKNES | S | PRESSURE | PSI | PRESSURE | PSI | | RADIUS | WEIGHT | LENGTH | | |
| Code | mm | mm | mm | mm | Bar | PSI | Bar | PSI | mm | Kg/mtr | mtr | Bar | --- | mtr |
| 11PVCEW40 | 40.00 | 48.00 | 2.80 | | 5 | 70 | 15 | 210 | 195 | 0.62 | 30 | 0.70 | YES | 5 |
| 11PVCEW50 | 50.00 | 59.00 | 2.80 | | 5 | 70 | 15 | 210 | 235 | 0.88 | 30 | 0.70 | YES | 5 |
| 11PVCEW60 | 60.00 | 69.00 | 2.80 | | 5 | 70 | 15 | 210 | 275 | 1.13 | 30 | 0.70 | YES | 5 |

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.

LALIT MACHINERY STORE

64 & 65, Ajmeri Gate, Delhi-110006

Contact : +91- 9555995522 | Email : Lms@hosexperts.com | Web : www.hosexperts.com

BANK DETAILS

HDFC Bank A/c No: 5020 0006647 423

RTGS/NEFT IFSC:HDFC0000558