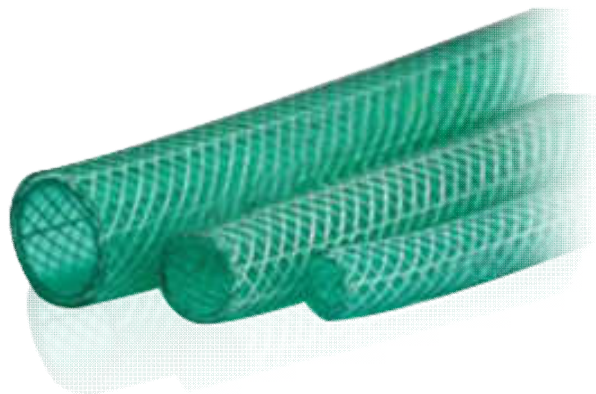



TUBE:

- ▶ Smooth Plasticized PVC
- ▶ Smooth Interior

REINFORCEMENT:

- ▶ Fabric Reinforced

COVER:

- ▶ Smooth PVC Exterior Wall

TEMP RANGE:

- ▶ -10 °C Approx. To +70 °C Approx.

APPLICATIONS:

- ▶ Gardening, Irrigation & General Water Discharge in Steel Mills, Engineering Works & on Construction Sites.

PROPERTIES:

- ▶ Optimized Flow Properties
- ▶ Small Bending Radius
- ▶ Long Service Life

FEATURES:

- ▶ Light weight & Flexible
- ▶ Abrasion Resistant

STANDARD COLOUR:

- ▶ Green

MARKING ON THE HOSE:

- ▶ Duplon Garden Hose Size ... WP...



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar PSI	Bar PSI	mm	Kg/Coil	mtr	Bar	---	Coils
2GRD12100	12.00	16.00	2.00	7 100	21 300	-	-	100	-	NO	3
2GRD20100	20.00	25.00	2.50	7 100	21 300	-	-	100	-	NO	3
2GRD2550	25.00	31.00	3.00	5 75	15 225	-	-	50	-	NO	3
2GRD25100	25.00	31.00	3.00	5 75	15 225	-	-	100	-	NO	1

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.