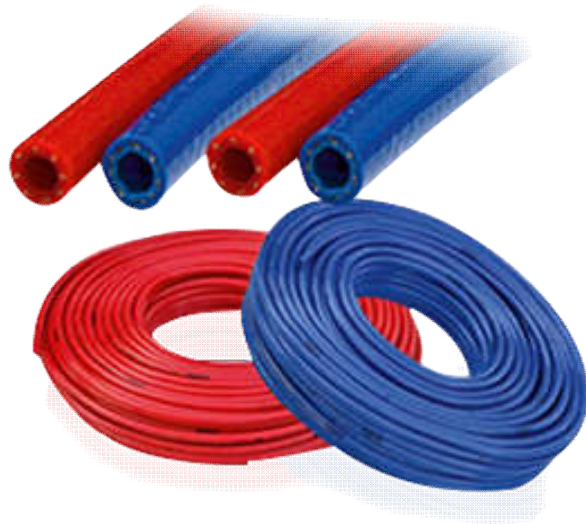



TUBE:

- ▶ Smooth Plasticized PVC
- ▶ Smooth Interior

REINFORCEMENT:

- ▶ Fabric Reinforced

COVER:

- ▶ Smooth PVC Exterior Wall

TEMP RANGE:

- ▶ -10 °C Approx. To +70 °C Approx.

APPLICATIONS:

- ▶ Suitable for Oxygen & Acetylene Welding & Cutting Equipment In All Types Industrial Workshops, Oil Refineries , Steel Mills, Ship Building & Repair yards, Service Stations Garages etc.

PROPERTIES:

- ▶ Optimized Flow Properties
- ▶ Small Bending Radius
- ▶ Long Service Life
- ▶ Strong Enough to withstand High Pressure, Total Consolidation & Adhesion Levels are Superb.
- ▶ Resistant to Oil, Chemicals & Moisture.

FEATURES:

- ▶ Light weight & Flexible
- ▶ Abrasion Resistant
- ▶ Rodent Proof
- ▶ Crush & Kink Resistant

STANDARD COLOUR:

- ▶ Red & Blue

MARKING ON THE HOSE:

- ▶ Duplon Braided Hose Size.... WP....



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar PSI	Bar PSI	mm	Kg/mtr	mtr	Bar	---	mtr
2WLDB8	8.00	14.00	3.00	25 360	75 1080	-	-	100	-	YES	100
2WLDR8	8.00	14.00	3.00	25 360	75 1080	-	-	100	-	YES	100
2WLDB10	10.00	17.00	3.50	25 360	75 1080	-	-	100	-	YES	100
2WLDR10	10.00	17.00	3.50	25 360	75 1080	-	-	100	-	YES	100

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.