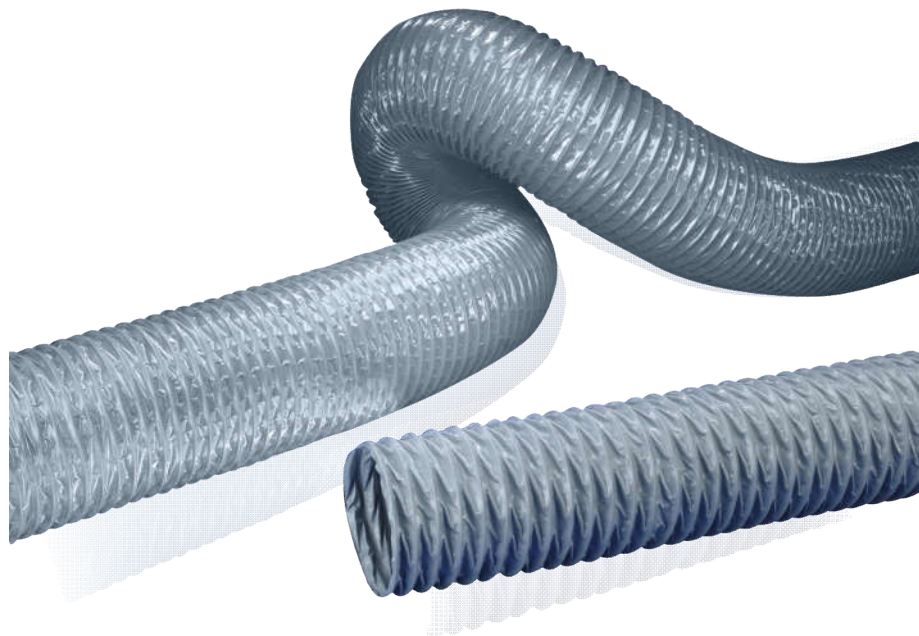



TUBE:

- Fabric Reinforced Tape

REINFORCEMENT:

- Spring Steel Wire Integrated in Wall
- Spiral: Spring Steel Wire

COVER:

- PVC Coated Polyester Fabric

TEMP RANGE:

- -20 °C Approx. to +80 °C Approx

APPLICATIONS:

- For Welding Gas Extraction
- For Air Conditioning & Ventilation Technology
- Suction of Engine Exhaust Gas
- Exhaust Gas Technique, Engine Construction, Engine Warming, Aircraft Construction & Military Construction.
- Light Duty Dust Extraction & Air Movement
- For Flue Gas Extraction, Blast Furnace, Exhaust & Engine Test Bench.

PROPERTIES:

- Super Light Model
- Highly Flexible & Compressible 10:1
- Vibration Resistant
- Tearing Resistant
- High Tensile Strength
- Very Small Bending Radius
- Capable of Electrostatic Discharge by Grounding the Spiral.
- Flame Retardant ACC To UL94-HB

STANDARD COLOUR:

- Grey

MARKING ON THE HOSE:

- NA



ITEM Code	ID mm	OD mm	WALL THICKNES S mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS mm	WEIGHT Kg/mtr	STANDARD	VACCUM	EX-STOCK	MOQ
				Bar	PSI	Bar	PSI			LENGTH mtr	PRESSURE Bar		
FB50	50.00	54.00	0.30	0.20	2.90	-	-	50	0.10	10	0.10	YES	10
FB63	63.00	67.00	0.30	0.18	2.61	-	-	63	0.15	10	0.09	YES	10
FB76	76.00	80.00	0.30	0.16	2.32	-	-	76	0.16	10	0.08	YES	10
FB100	100.00	104.00	0.30	0.12	1.74	-	-	100	0.22	10	0.05	YES	10
FB125	125.00	129.00	0.30	0.10	1.45	-	-	125	0.30	10	0.04	YES	10
FB150	150.00	154.00	0.30	0.08	1.16	-	-	150	0.34	10	0.03	YES	10
FB203	203.00	208.00	0.30	0.06	0.87	-	-	203	0.43	10	0.02	YES	10
FB254	254.00	259.00	0.30	0.05	0.73	-	-	254	0.61	10	0.01	YES	10
FB305	305.00	310.00	0.30	0.04	0.58	-	-	305	0.72	10	0.01	YES	10

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.

LALIT MACHINERY STORE

64 & 65, Ajmeri Gate, Delhi-110006

Contact : +91- 9555995522 | Email : Lms@hosexperts.com | Web : www.hosexperts.com

BANK DETAILS

HDFC Bank A/c No: 5020 0006647 423

RTGS/NEFT IFSC:HDFC0000558