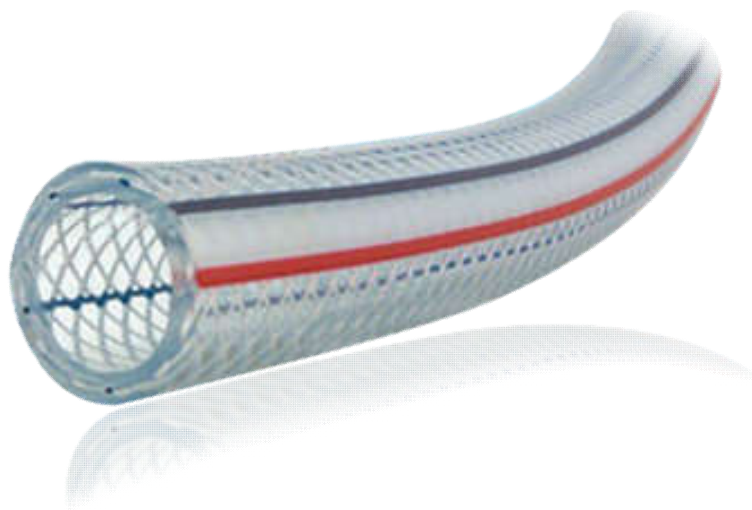



TUBE:

- Fabric Reinforced Wall
- Smooth PVC Interior Wall

REINFORCEMENT:

- Fabric Reinforced

COVER:

- Smooth PVC Exterior Wall

TEMP RANGE:

- -10 °C Approx. To +65 °C Approx.

APPLICATIONS:

- Multipurpose Hose for Air, Pneumatic, Heavy Duty Delivery of Water & Chemicals

PROPERTIES:

- Optimized Flow Properties
- Good Resistance To Alkali, Acids, UV, Ozone, Oil, Chemicals & Moisture.
- Gas & Liquid Tight
- Crush-Proof & Kink Resistant

FEATURES:

- Highly Flexible
- Small Bending Radius
- Abrasion Resistant
- Strong Enough To Withstand High Pressure, Total Consolidation & Adhesion Levels Are Superb.

STANDARD COLOUR:

- Transparent with Three Coloured Line (Red, White & Blue)

MARKING ON THE HOSE:

- HoseX TORNADO POLY - BRAIDED HOSE 6 MM WP 10 BAR Mtr 01,02.....→ | | ←



ITEM	ID	OD	WALL THICKNES	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACCUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	S	Bar	PSI	Bar	PSI	mm	Kg/mtr	mtr	Bar	---	mtr
501TP06	6.00	12.00	3.00	10	145	30	435	-	0.110	100	-	YES	100
501TP10	10.00	16.00	3.00	9	130	27	390	-	0.170	100	-	YES	100
501TP12	12.00	18.00	3.00	8	115	24	345	-	0.190	100	-	YES	100
501TP20	20.00	26.00	3.00	6	87	18	260	-	0.290	50	-	YES	50
501TP25	25.00	32.00	3.50	6	87	18	260	-	0.420	50	-	YES	50

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.