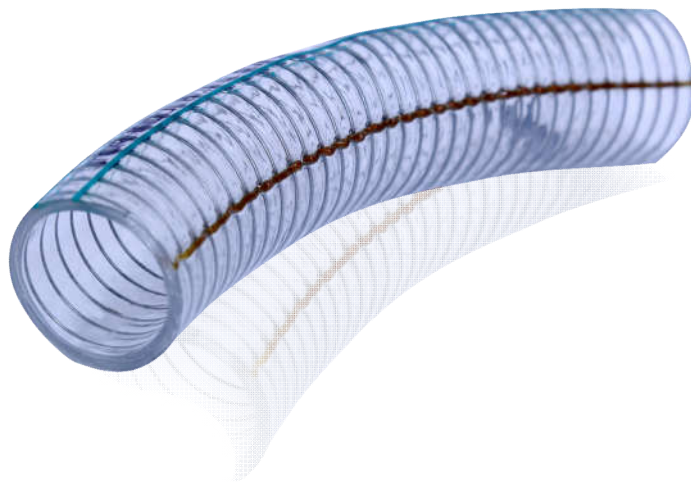



TUBE:

- Strong Very Flexible & Smooth ,Transparent Plasticized PVC.

REINFORCEMENT:

- Shock Resistant Galvanised Steel Spiral Wire & Straight Copper Wire Inserted.

COVER:

- Crushing, Abrasion & Weather Resistant Smooth Plasticized PVC.

TEMP RANGE:

- -5 °C Approx. to +65 °C Approx

APPLICATIONS:

- Specially used for Conveying Gas, Liquid & Powder in places easily generating Static Charge such as Buildings, Factories, Mines, Oil Storage.

FEATURES:

- With Copper Wire inserted in the hose, this hose Can avoid the blockage of the flowing media due To generation of Static Charge & also protect Users from electric shock or electric current Impingment.

STANDARD COLOUR:

- Transparent With Two Lines

MARKING ON THE HOSE:

- HoseX TORNADO EARTH - PVC ANTI STATIC HOSE (-5°C + 65°C)
1" (25MM X 32MM) WP 6BAR Mtr 01,02..... → | | ←



ITEM Code	ID mm	OD mm	WALL THICKNES S mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS mm	WEIGHT Kg/mtr	STANDARD LENGTH mtr	VACCUM PRESSURE Bar	EX-STOCK ---	MOQ mtr
				Bar	PSI	Bar	PSI						
501TE25	25.00	32.00	3.50	6	87	18	260	60	0.48	30	0.88	YES	5
501TE40	40.00	48.00	4.00	5	72	15	215	90	0.90	30	0.88	YES	5
501TE50	50.00	60.00	5.00	5	72	15	215	125	1.31	30	0.79	YES	5
501TE60	60.00	70.00	5.00	4	58	12	175	150	1.98	30	0.69	YES	5
501TE75	75.00	87.00	6.00	4	58	12	175	195	2.56	20	0.69	YES	5

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.