


## PAINT SPRAY-2W

# HOSEX

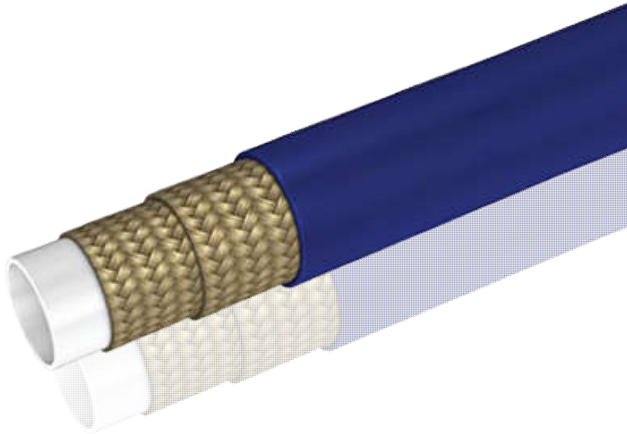

### TUBE:

Polyamide

### REINFORCEMENT:

Double Braids Of Steel Wire

### COVER:

Polyurethane

Blue Colour

Pin Pricking (Optional)

### TEMP RANGE:

-40°C Approx to +100°C Approx

Not To Exceed +70°C For Air And Water

Based Fluids

### APPLICATIONS:

High Pressure Airless Paint Spray Systems For 150 To 450 Bar.

Suitable For Applications Requiring Chemical Resistance To Solvents And Aggressive Fluids Due To Low Permeation Value Of Polyamide, The Hose Is Also Suitable For Industrial Gases the hose is also suitable for industrial gases.

### STANDARD COLOUR:

Blue

### MARKING ON THE HOSE:

HoseX Paint Spray 2W Hose ID..WP..PSI/BAR



ITEM	ID	OD	WALL THICKNES S	WORKING PRESSURE	BURSTING PRESSURE	BENDING RADIUS	WEIGHT	STANDAR D LENGTH	VACCUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar PSI	Bar PSI	mm	Kg/mtr	mtr	Bar	---	mtr
501TPPS2W04	6.40	13.70	3.65	450 6500	1800 26000	100	0.34	-	-	YES	5
501TPPS2W06	9.50	17.50	4.00	380 5500	1520 22000	127	0.48	-	-	YES	5

Specification Subject to change due to Improvement in Quality ( E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.

### LALIT MACHINERY STORE

64 & 65, Ajmeri Gate, Delhi-110006

Contact : +91- 9555995522 | Email : Lms@hosexperts.com | Web : www.hosexperts.com

### BANK DETAILS

HDFC Bank A/c No: 5020 0006647 423

RTGS/NEFT IFSC:HDFC0000558