


PAINT SPRAY-1W

HOSEX

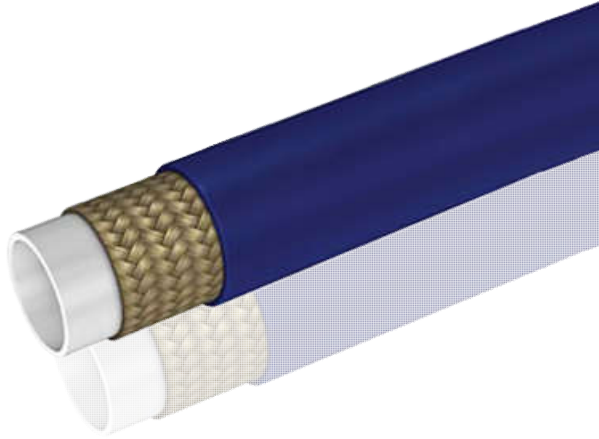

TUBE:

Polyamide

REINFORCEMENT:

Single Braid Of Steel Wire

COVER:

Polyurethane

Blue Colour

Pin Pricking (Optional)

TEMP RANGE:

-40°C Approx to +100°C Approx

Not To Exceed +70°C For Air And Water

Based Fluids

APPLICATIONS:

Airless Paint Spray Systems For 100 To 350 Bar.

Suitable For Applications Requiring Chemical Resistance To Solvents And Aggressive Fluids

Due To Low Permeation Value Of Polyamide,

The Hose Is Also Suitable For Industrial Gases

STANDARD COLOUR:

Blue

MARKING ON THE HOSE:

HoseX Paint Spray 1W Hose ID..WP..PSI/BAR



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar PSI	Bar PSI	mm	Kg/mtr	mtr	Bar	---	mtr
501TPPS1W04	6.40	11.70	2.65	320 4650	1280 18600	40	0.18	-	-	YES	5
501TPPS1W06	9.50	15.20	2.85	250 3600	1000 14400	60	0.26	-	-	YES	5

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.

LALIT MACHINERY STORE

64 & 65, Ajmeri Gate, Delhi-110006

Contact : +91- 9555995522 | Email : Lms@hosexperts.com | Web : www.hosexperts.com

BANK DETAILS

HDFC Bank A/c No: 5020 0006647 423

RTGS/NEFT IFSC:HDFC0000558