


## TPE MEMORY HOSE

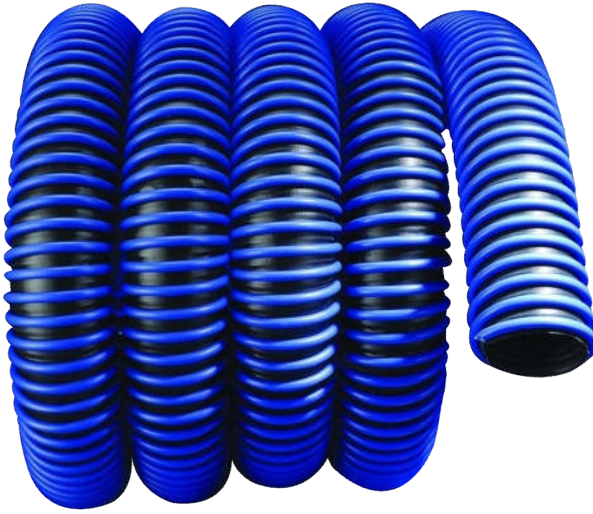

### TUBE:

TPE+TPV Coated Fabric  
Fabric-Reinforced Tape

### REINFORCEMENT:

Plastic Profile Supporting Spiral

### COVER:

Special Hollow Plastic Helix

### TEMP RANGE:

Exhaust Gas Temperatures up to +170°C

### APPLICATIONS:

For Suction Of Vehicle Engine Exhaust Gas  
For Hose Reel  
For Slotted Floor Channels  
For Above & Below Floor Suction Extraction

### PROPERTIES:

Vibration Resistant, Crush-Proof, Highly Flexible  
& Compressible, Good Resistance To Chemicals.  
Small Bending Radius, Gas & Liquid Tight,  
Flame-Retardant Acc to UL94-HB.

### STANDARD COLOUR:

Black & Blue

### MARKING ON THE HOSE:

Na



ITEM	ID	OD	WALL THICKNES S	WORKING PRESSURE	BURSTING PRESSURE	BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACCUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar PSI	Bar PSI	mm	Kg/mtr	mtr	Bar	---	mtr
11TPEM50	50.00	67.00	0.55	- -	- -	80	0.41	15	0.40	NO	60
11TPEM63	63.00	80.00	0.55	- -	- -	101	0.51	15	0.28	NO	60
11TPEM76	76.00	93.00	0.55	- -	- -	111	0.54	15	0.18	NO	60
11TPEM100	100.00	117.00	0.55	- -	- -	120	0.72	15	0.05	NO	45

Specification Subject to change due to Improvement in Quality ( E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.

### LALIT MACHINERY STORE

64 & 65, Ajmeri Gate, Delhi-110006  
Contact : +91- 9555995522 | Email : Lms@hosexperts.com | Web : www.hosexperts.com

### BANK DETAILS

HDFC Bank A/c No: 5020 0006647 423  
RTGS/NEFT IFSC:HDFC0000558