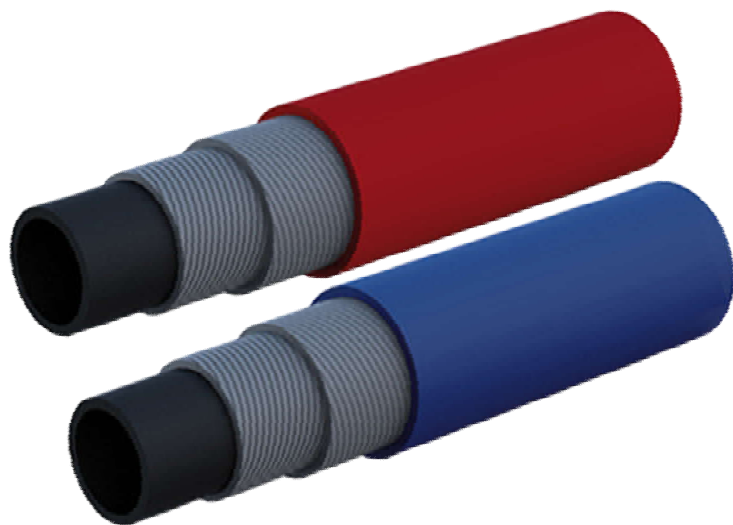



TUBE:

Black, Smooth, Synthetic Rubber Resistant to Oxygen & Acetylene.

REINFORCEMENT:

High Tensile Textile Plies

COVER:

Black, Smooth, Weather, Abrasion & Flame Resistant Special Synthetic Rubber.

TEMP RANGE:

-30°C Approx to +80°C Approx

APPLICATIONS:

For Industrial Welding with Oxygen & Acetylene

PROPERTIES:

Seamless
Uniform Thickness
Smooth Bore
Mandrel Built

FEATURES:

Flame Resistant Special Synthetic Rubber Cover

STANDARD COLOUR:

Red for Acetylene
Blue for Oxygen

MARKING ON THE HOSE:

Dunlop Premium Welding Hose Exceeds
IS 447:1988 Type II

APPLICABLE STANDARDS:

IS : 447/1988 Type II



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACCUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar PSI	Bar PSI	mm	Kg/mtr	mtr	Bar	---	mtr
3WLDR8	8.00	15.00	3.50	18 260	54 780	-	0.19	100	-	YES	5
3WLDB8	8.00	15.00	3.50	18 260	54 780	-	0.19	100	-	YES	5
3WLDR10	10.00	17.00	3.50	18 260	54 780	-	0.22	100	-	YES	5
3WLDB10	10.00	17.00	3.50	18 260	54 780	-	0.22	100	-	YES	5

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.