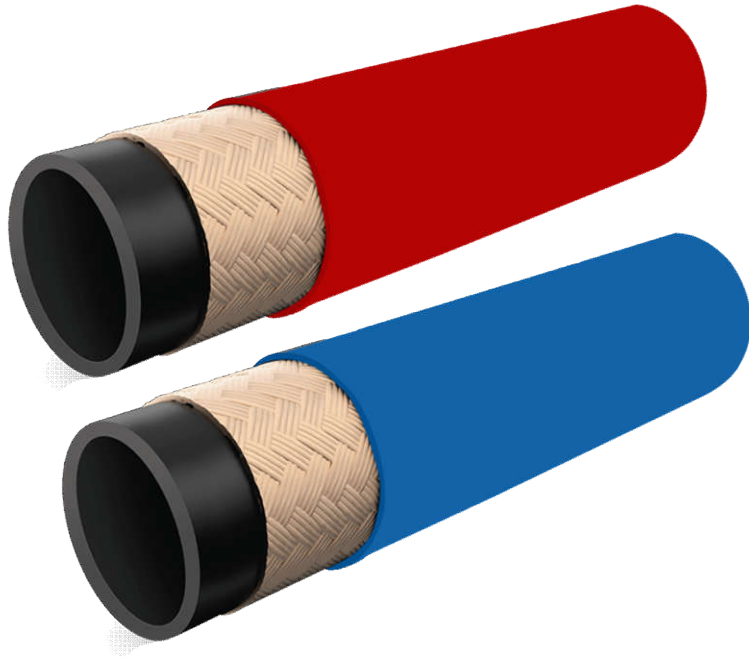



TUBE:

Black, Smooth, Synthetic Rubber Resistant to Oxygen & Acetylene.

REINFORCEMENT:

High Tensile Textile Plies

COVER:

Black, Smooth, Weather, Abrasion & Flame Resistant Special Synthetic Rubber.
Fabric Impression

TEMP RANGE:

-30°C Approx to +80°C Approx

APPLICATIONS:

For Industrial Welding with Oxygen & Acetylene

PROPERTIES:

Seamless
Uniform Thickness
Smooth Bore
Mandrel Built

FEATURES:

Flame Resistant Special Synthetic Rubber Cover

STANDARD COLOUR:

Red for Acetylene
Blue for Oxygen

MARKING ON THE HOSE:

Super Excel Welding Hose Made in India

APPLICABLE STANDARDS:

As per IS : 447/1987 Type III(D)



ITEM	ID	OD	WALL		WORKING		BURSTING		BENDING		STANDAR		EX-STOCK	MOQ
			THICKNES	S	PRESSURE	PSI	PRESSURE	PSI	RADIUS	WEIGHT	D	VACCUM		
Code	mm	mm	mm		Bar	PSI	Bar	PSI	mm	Kg/mtr	mtr	Bar	---	mtr
1WLDR6	6.00	15.00	4.50		25	360	75	1080	30	0.19	-	-	NO	200
1WLDB6	6.00	15.00	4.50		25	360	75	1080	30	0.19	-	-	NO	200
1WLDR8	8.00	16.00	4.00		25	360	75	1080	35	0.25	-	-	YES	5
1WLDB8	8.00	16.00	4.00		25	360	75	1080	35	0.25	-	-	YES	5
1WLDR10	10.00	18.50	4.25		25	360	75	1080	45	0.28	-	-	YES	5
1WLDB10	10.00	18.50	4.25		25	360	75	1080	45	0.28	-	-	YES	5

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.