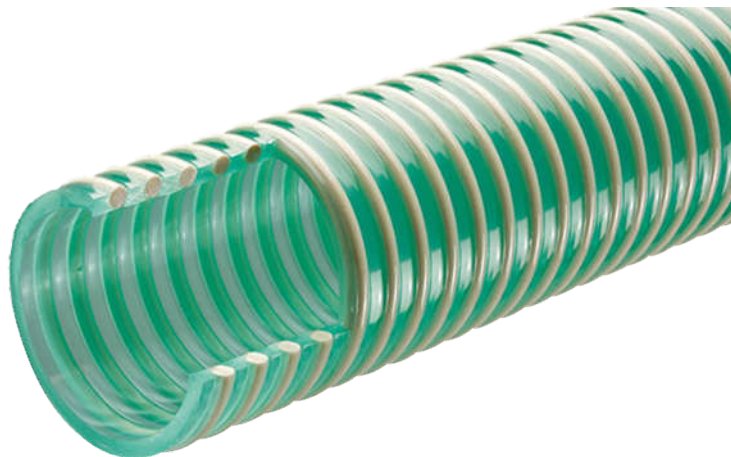



TUBE:

Strong, Flexible & Smooth Plasticized PVC.

REINFORCEMENT:

Shock Resistant Hard Rigid PVC Spiral.

COVER:

Hard Rigid PVC.

TEMP RANGE:

-10°C to +70°C Approx.

APPLICATIONS:

Suction & Delivery Of Water For Irrigation
 Purpose Agriculture With Electro Mono Block &
 Oil Engines.
 Suction & Delivery Of Saline Water, Light Acids,
 Alkalies & Other Chemicals Except Solvents.
 For Conveying Of Granules or Fine Particles Of
 Raw Materials In Processing Industries.

PROPERTIES:

Light Weight
 Long Retained Flexibility
 Excellent Resistance to High Pressure
 No Kinking, Bulging Or Bursting Even In The Most
 Severe Working Conditions.

STANDARD COLOUR:

Green

MARKING ON THE HOSE:

ASHISH REALFLEX M.DUTY SUCTION (GREEN) &
 DELIVERY PVC PIPE MFG. AAPL (INDIA) CODE....



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar PSI	Bar PSI	mm	Kg/mtr	mtr	Bar	---	mtr
4MD20	19.00 ± 0.5	23.60 ± 1.0	2.30	7 100	21 300	45	0.23	30	-	YES	30
4MD25	25.40 ± 0.5	30.00 ± 1.0	2.30	7 100	21 300	55	0.30	30	-	YES	30
4MD30	31.80 ± 0.5	36.80 ± 1.0	2.50	6.5 95	19.5 285	75	0.38	30	-	YES	30
4MD40	38.50 ± 0.5	43.30 ± 1.0	2.40	5 75	15 225	95	0.52	30	-	YES	5
4MD50	50.80 ± 0.5	57.80 ± 1.5	3.50	4 60	12 180	122	0.83	30	-	YES	5
4MD60	60.00 ± 1.0	68.00 ± 1.5	4.00	4 60	12 180	150	1.00	30	-	NO	60
4MD65	63.50 ± 1.0	72.00 ± 1.5	4.25	4 60	12 180	160	1.17	30	-	YES	5
4MD75	76.20 ± 1.0	85.00 ± 1.5	4.40	3.5 50	10.5 150	272	1.50	30	-	YES	5
4MD90	90.00 ± 1.0	100.00 ± 1.5	5.00	3.5 50	10.5 150	280	2.00	30	-	NO	30
4MD100	101.20 ± 1.0	112.20 ± 2.0	5.50	3.5 50	10.5 150	290	2.50	30	-	YES	5

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.