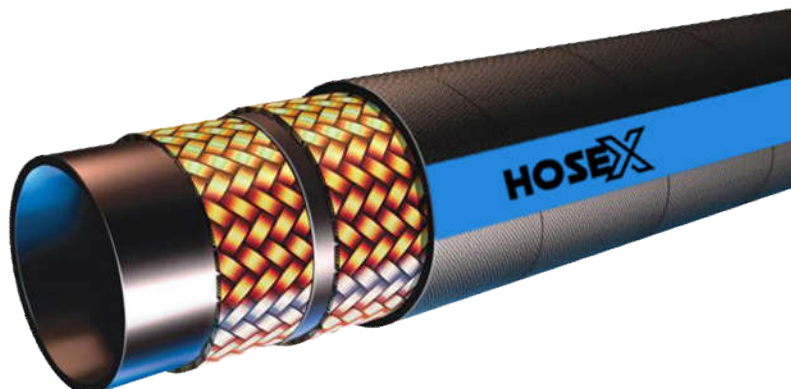



TUBE:

Oil Resistant Synthetic Rubber

REINFORCEMENT:

Two High Tensile Steel Braid

COVER:

 Environment & Oil Resistant Synthetic Rubber
 Fabric impression, Smooth finish upto 25mm

TEMP RANGE:

 Continuous Service: -40°C/+100°C
 Maximum Temperature:(Intermittent Service) 125°C

APPLICATIONS:

Medium - High Pressure Lines, Return Lines

STANDARD COLOUR:

Black

MARKING ON THE HOSE:

 HoseX 2SN DN 25 DIN/EN 853 - Exceeds
 SAE 100 R2 AT 1"- 25.4 MM - WP 16.Mpa/
 165Bar/2393PSI - MSHA

APPLICABLE STANDARDS:

SAE 100 R2 AT (EN 853 2SN)



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACCUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar PSI	Bar PSI	mm	Kg/mtr	mtr	Bar	---	mtr
501R204(P)	6.40	15.00	4.30	400 5800	1600 23200	100	0.32	-	-	YES	5
501R205(P)	7.90	16.60	4.35	350 5075	1400 20300	115	0.45	-	-	YES	5
501R206(P)	9.50	19.00	4.75	330 4785	1320 19140	127	0.53	-	-	YES	5
501R208(P)	12.70	22.20	4.75	275 3988	1100 15950	178	0.70	-	-	YES	5
501R210(P)	15.90	25.40	4.75	250 3625	1000 14500	200	0.85	-	-	YES	5
501R212(P)	19.10	29.30	5.10	215 3118	860 12470	241	1.00	-	-	YES	5
501R216(P)	25.40	38.10	6.35	165 2393	660 9570	300	1.35	-	-	YES	5
501R220	31.80	48.30	8.25	125 1813	500 7250	420	1.90	-	-	YES	5
501R224	38.10	54.60	8.25	90 1305	360 5220	500	2.30	-	-	YES	5
501R232	50.80	67.30	8.25	80 1160	320 4640	635	2.95	-	-	YES	5
501R240	63.50	83.00	9.75	70 1015	280 4060	760	3.96	-	-	YES	5
501R248	76.20	96.00	9.90	55 798	220 3192	900	4.96	-	-	YES	5

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.