


HIGH PRESSURE SUCTION & DELIVERY HOSE

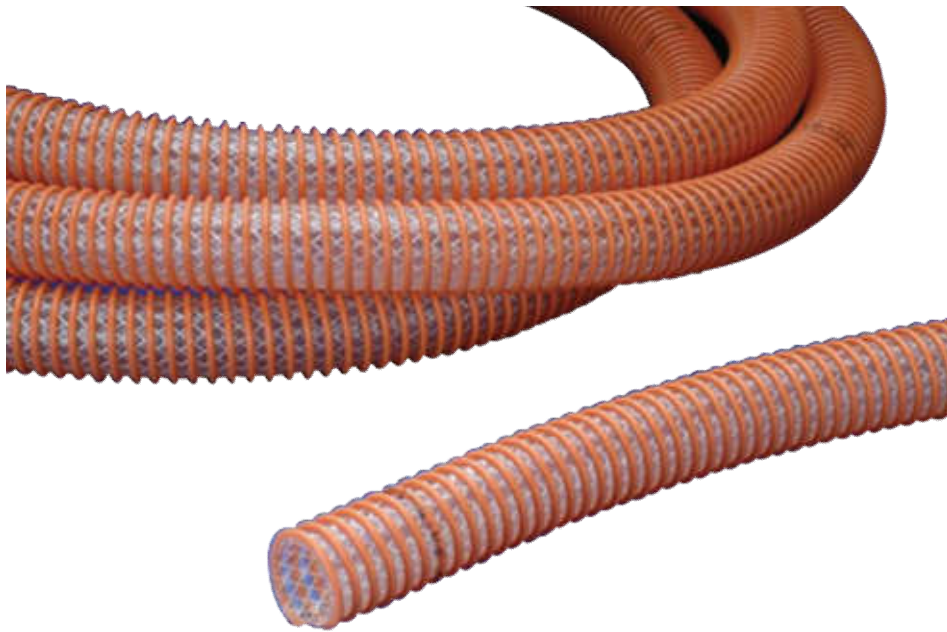

DUTRON

TUBE:

Strong, Flexible Smooth Plasticized PVC
Smooth Bore

REINFORCEMENT:

High Tensile Strength Yarn Braiding

COVER:

Shock Resistant
Hard Rigid PVC Helix
Corrugated OD

TEMP RANGE:

-5°C Approx to +70°C Approx

APPLICATIONS:

Heavy Duty Applications requiring Combined
Vacuum & Higher Working Pressure
Irrigation Lines
Fish Suction
Mining
Heavy Industries
Submarines

PROPERTIES:

Strong Resistance To Most Chemicals, Acids
& Alkalies.
Abrasion Resistant
Crush Proof & Kink Proof
Does Not Allow Elongation during Application
Superior Replacement of Expensive Rubber Hose
Light Weight, Highly Flexible & Easier to Handle
Transparent Const. Allows Visual Flow of Material
Rigid Helix Design Protects Hose Cover from Wear
& Allows Hose to Slide easily over Rough Surface

MARKING ON THE HOSE:

Dutron Line HP Hose ... Hose ID



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE		BURSTING PRESSURE		STANDARD LENGTH	VACUUM RATING at 40°C	EX-STOCK	MOQ
Code	mm	mm	mm	Bar	PSI	Bar	PSI	mtr	Bar	---	mtr
2HP40	38.10	49.00	-	7	102	20	290	30	28	No	30
2HP50	50.80	64.00	-	7	102	20	290	30	28	No	30
2HP65	63.50	76.00	-	7	102	20	290	30	28	No	30
2HP75	76.20	91.00	-	6	87	18	261	30	28	No	30
2HP100	101.60	118.00	-	5	73	16	232	30	25	No	30
2HP125	127.00	151.00	-	5	73	15	218	15	25	No	15
2HP150	152.40	182.00	-	5	73	15	218	15	25	No	15
2HP200	203.20	236.00	-	4	58	12	174	6	20	No	6

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.

LALIT MACHINERY STORE

64 & 65, Ajmeri Gate, Delhi-110006

Contact : +91- 9555995522 | Email : Lms@hosexperts.com | Web : www.hosexperts.com

BANK DETAILS

HDFC Bank A/c No: 5020 0006647 423

RTGS/NEFT IFSC:HDFC0000558