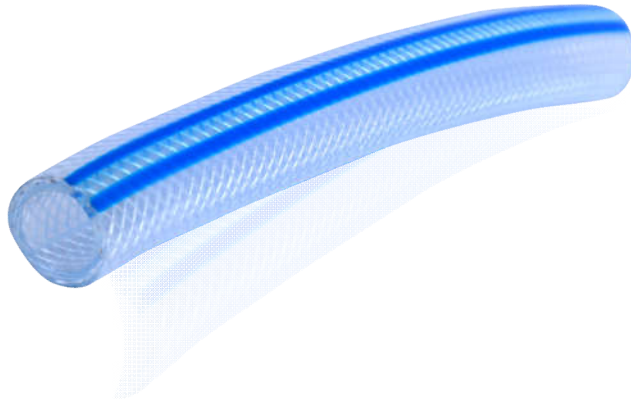



TUBE:

- ▶ Transparent Plasticized PVC Tube
- ▶ Smooth Interior & Exterior Wall

REINFORCEMENT:

- ▶ High Tensile Synthetic Textile Reinforcement

COVER:

- ▶ Smooth PVC Exterior Wall

TEMP RANGE:

- ▶ -10 °C Approx. To +70 °C Approx.

APPLICATIONS:

- ▶ Multipurpose Hose for Air, Pneumatic, Heavy Duty Delivery of Water & Chemicals.

PROPERTIES:

- ▶ Optimized Flow Properties
- ▶ Good Resistance To Alkali, Acids, UV, Ozone, Oil, Chemicals & Moisture.
- ▶ Gas & Liquid Tight
- ▶ Crush-Proof & Kink Resistant

FEATURES:

- ▶ Highly Flexible
- ▶ Small Bending Radius
- ▶ Abrasion Resistant
- ▶ Strong Enough To Withstand High Pressure, Total Consolidation & Adhesion Levels Are Superb.

STANDARD COLOUR:

- ▶ Transparent

MARKING ON THE HOSE:

- ▶ Dunlop Dunloflex Braided Hose Size... WP ...
Mfg Sel



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar	PSI	Bar	PSI	mm	Kg/mtr	mtr	Bar	---	mtr
3BR6	6.00	12.00	3.00	25	360	75	1080	-	-	100	-	YES	100
3BR8	8.00	14.00	3.00	25	360	75	1080	-	-	100	-	YES	100
3BR10	10.00	17.00	3.50	25	360	75	1080	-	-	100	-	YES	100
3BR12	12.00	19.00	3.50	20	290	60	870	-	-	100	-	YES	100
3BR15	15.00	22.00	3.50	20	290	60	870	-	-	100	-	NO	100
3BR20	20.00	28.00	4.00	20	290	60	870	-	-	100	-	YES	100
3BR25	25.00	34.60	4.80	15	220	45	660	-	-	100	-	YES	100
3BR30	30.00	39.60	4.80	15	220	45	660	-	-	50	-	YES	50
3BR40	40.00	50.00	5.00	15	220	45	660	-	-	50	-	YES	50
3BR50	50.00	62.00	6.00	5	72	15	215	-	-	50	-	YES	50

Specification Subject to Change Due to Improvement in Quality (E & O.E).

In the Interest of Continual development, The company Reserves The Right to Make Modifications to These Details Without Prior Notice.

LALIT MACHINERY STORE

64 & 65, Ajmeri Gate, Delhi-110006

Contact : +91- 9555995522 | Email : Lms@hosexperts.com | Web : www.hosexperts.com

BANK DETAILS

HDFC Bank A/c No. 5020 0006647 423

RTGS/NEFT IFSC:HDFC0000558