


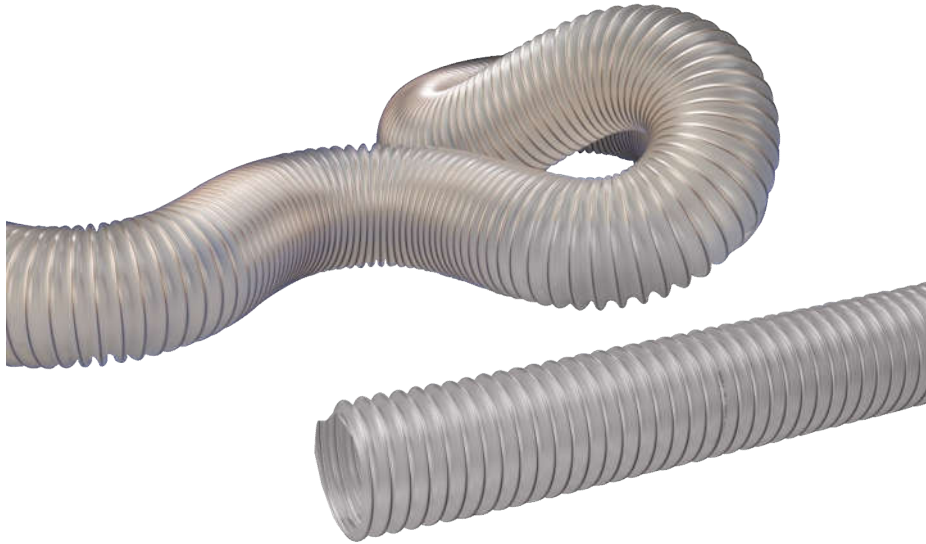

TUBE:

Ester-Polyurethane

REINFORCEMENT:

Copper Coated Spring Steel Wire Integrated In Wall

TEMP RANGE:

-40°C Approx to +90°C Approx
Short Time to +125°C Approx

APPLICATIONS:

For Extraction Arms & Dust Collection Equipment
For CNC Machining Areas
For Abrasive Solids Such As Dust, Powder, Fibers & Chip.
For Industrial Air Movement & Fume Control

PROPERTIES:

Optimised Flow Properties
Microbe & Hydrolysis Resistant
Good Resistant to UV & Ozone
Chemical Resistant
Very Good Low Temperature Flexibility
Small Bending Radius, Excellent Compressibility 3:1
Kink-Proof, Good Tensile, Anti-Static By Grounding the Spiral.
Gas & Liquid Tight, Good Resistance to Abrasion

FEATURES:

Wall Thickness 0.6 mm

STANDARD COLOUR:

Transparent

MARKING ON THE HOSE:

Size...mm PU M Flexible Hose 0.6mm

PU M FLEXIBLE HOSE



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar	PSI	Bar	PSI	mm	Kg/mtr	mtr	Bar	---	mtr
501PUM32	32.00	40.00	0.60	1.10	16.00	-	-	25	0.20	15	0.30	NO	90
501PUM38	38.00	46.00	0.60	0.90	13.00	-	-	27	0.22	15	0.30	NO	90
501PUM40	40.00	48.00	0.60	0.90	13.00	-	-	30	0.24	15	0.25	NO	90
501PUM50	50.00	58.00	0.60	0.70	10.00	-	-	35	0.38	15	0.20	NO	1
501PUM60	60.00	68.00	0.60	0.60	9.00	-	-	40	0.45	15	0.16	NO	90
501PUM63	63.00	71.00	0.60	0.55	8.00	-	-	43	0.49	15	0.16	NO	1
501PUM76	76.00	84.00	0.60	0.47	7.00	-	-	53	0.57	15	0.10	NO	1
501PUM80	80.00	88.00	0.60	0.43	6.00	-	-	55	0.60	15	0.10	NO	90
501PUM90	90.00	98.00	0.60	0.39	6.00	-	-	65	0.68	15	0.10	NO	90
501PUM102	102.00	110.00	0.60	0.35	5.00	-	-	70	0.79	15	0.09	NO	1
501PUM110	110.00	118.00	0.60	0.30	4.00	-	-	75	0.85	15	0.08	NO	90
501PUM120	120.00	128.00	0.60	0.28	4.00	-	-	80	0.90	15	0.08	NO	90
501PUM127	127.00	135.00	0.60	0.28	4.00	-	-	85	0.95	15	0.08	NO	1
501PUM140	140.00	148.00	0.60	0.25	4.00	-	-	95	1.05	15	0.08	NO	90
501PUM150	150.00	158.00	0.60	0.17	2.00	-	-	100	1.15	15	0.06	NO	1
501PUM160	160.00	168.00	0.60	0.16	2.00	-	-	110	1.20	15	0.06	NO	90
501PUM180	180.00	188.00	0.60	0.15	2.00	-	-	120	1.35	15	0.05	NO	90
501PUM200	200.00	208.00	0.60	0.14	2.00	-	-	135	1.45	15	0.05	NO	1
501PUM220	220.00	228.00	0.60	0.11	2.00	-	-	150	1.55	15	0.05	NO	60
501PUM250	250.00	258.00	0.60	0.10	1.00	-	-	170	2.00	15	0.04	NO	60
501PUM280	280.00	288.00	0.60	0.10	1.00	-	-	185	2.20	15	0.03	NO	60
501PUM300	300.00	308.00	0.60	0.09	1.00	-	-	200	2.40	15	0.03	NO	60
501PUM350	350.00	358.00	0.60	0.07	1.00	-	-	250	2.80	15	0.02	NO	40
501PUM400	400.00	408.00	0.60	0.05	0.70	-	-	270	3.20	10	0.02	NO	40
501PUM450	450.00	458.00	0.60	0.03	0.45	-	-	350	4.00	10	0.01	NO	40
501PUM500	500.00	508.00	0.60	0.02	0.30	-	-	400	5.40	10	0.01	NO	40
501PUM600	600.00	608.00	0.60	0.02	0.30	-	-	500	6.10	10	0.01	NO	40

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.

LALIT MACHINERY STORE

64 & 65, Ajmeri Gate, Delhi-110006

Contact : +91- 9555995522 | Email : Lms@hosexperts.com | Web : www.hosexperts.com

BANK DETAILS

HDFC Bank A/c No: 5020 0006647 423

RTGS/NEFT IFSC:HDFC0000558