


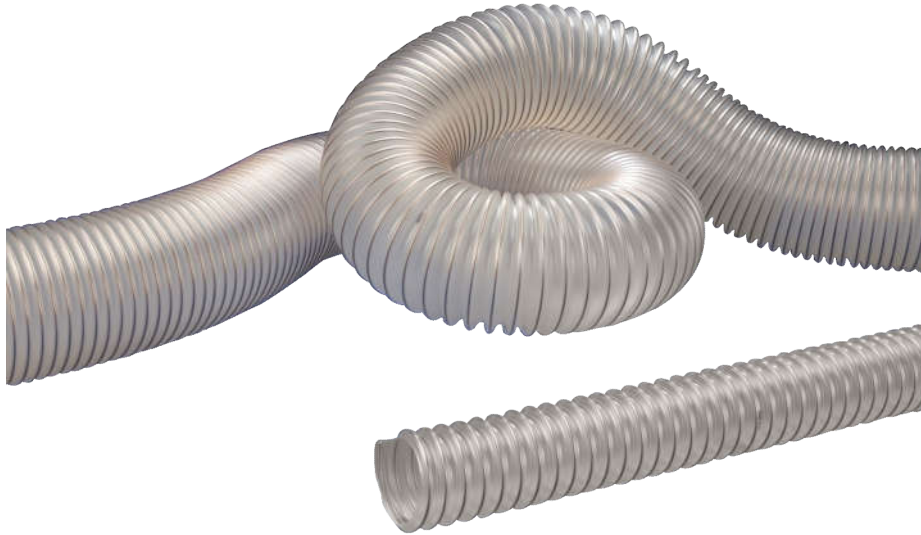

TUBE:

Ester-Polyurethane

REINFORCEMENT:

Copper Coated Spring Steel Wire Integrated In Wall

TEMP RANGE:

-40°C Approx to +90°C Approx
Short Time to +125°C Approx

APPLICATIONS:

For Extraction Arms & Dust Collection Equipment
For CNC Machining Areas
For Abrasive Solids Such As Dust, Powder, Fibers & Chip.
For Industrial Air Movement & Fume Control

PROPERTIES:

Optimised Flow Properties
Microbe & Hydrolysis Resistant
Good Resistant to UV & Ozone
Chemical Resistant
Very Good Low Temperature Flexibility
Small Bending Radius, Excellent Compressibility 4:1
Kink-Proof, Good Tensile, Anti-Static By Grounding the Spiral.
Gas & Liquid Tight, Good Resistance to Abrasion

FEATURES:

Wall Thickness 0.4 mm

STANDARD COLOUR:

Transparent

MARKING ON THE HOSE:

Size...mm PUL Flexible Hose 0.4mm

PU L FLEXIBLE HOSE



ITEM	ID	OD	WALL THICKNESS	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS	WEIGHT	STANDARD LENGTH	VACUUM PRESSURE	EX-STOCK	MOQ
Code	mm	mm	mm	Bar	Psi	Bar	Psi	mm	Kg/mtr	mtr	Bar	---	mtr
501PUL32	32.00	40.00	0.40	0.90	13.00	-	-	22	0.27	15	0.25	YES	1
501PUL38	38.00	46.00	0.40	0.85	12.00	-	-	27	0.28	15	0.25	YES	1
501PUL40	40.00	48.00	0.40	0.80	12.00	-	-	28	0.30	15	0.25	YES	1
501PUL50	50.00	58.00	0.40	0.70	10.00	-	-	35	0.32	15	0.20	YES	1
501PUL60	60.00	68.00	0.40	0.60	9.00	-	-	42	0.35	15	0.16	YES	1
501PUL63	63.00	71.00	0.40	0.55	8.00	-	-	45	0.36	15	0.14	YES	1
501PUL76	76.00	84.00	0.40	0.47	7.00	-	-	53	0.44	15	0.10	YES	1
501PUL80	80.00	88.00	0.40	0.43	6.00	-	-	56	0.47	15	0.10	YES	1
501PUL90	90.00	98.00	0.40	0.39	6.00	-	-	62	0.50	15	0.10	YES	1
501PUL102	102.00	110.00	0.40	0.35	5.00	-	-	70	0.51	15	0.09	YES	1
501PUL110	110.00	118.00	0.40	0.30	4.00	-	-	84	0.55	15	0.08	YES	1
501PUL120	120.00	128.00	0.40	0.28	4.00	-	-	85	0.60	15	0.08	YES	1
501PUL127	127.00	135.00	0.40	0.28	4.00	-	-	88	0.65	15	0.08	YES	1
501PUL140	140.00	148.00	0.40	0.25	4.00	-	-	95	0.71	15	0.06	YES	1
501PUL150	150.00	158.00	0.40	0.17	2.00	-	-	107	0.80	15	0.06	YES	1
501PUL160	160.00	168.00	0.40	0.16	2.00	-	-	110	0.82	15	0.05	YES	1
501PUL180	180.00	188.00	0.40	0.14	2.00	-	-	123	0.89	15	0.05	YES	1
501PUL200	200.00	208.00	0.40	0.13	2.00	-	-	140	1.04	15	0.05	YES	1
501PUL220	220.00	228.00	0.40	0.11	2.00	-	-	160	1.19	15	0.05	YES	1
501PUL250	250.00	258.00	0.40	0.10	1.00	-	-	175	1.25	15	0.04	YES	1
501PUL280	280.00	288.00	0.40	0.10	1.00	-	-	196	1.49	15	0.03	YES	1
501PUL300	300.00	308.00	0.40	0.09	1.00	-	-	210	1.55	15	0.03	YES	1
501PUL350	350.00	358.00	0.40	0.07	1.00	-	-	245	1.80	15	0.02	YES	1
501PUL400	400.00	408.00	0.40	0.05	0.70	-	-	280	2.10	10	0.02	NO	40
501PUL450	450.00	458.00	0.40	0.03	0.45	-	-	315	2.35	10	0.01	NO	40
501PUL500	500.00	508.00	0.40	0.02	0.30	-	-	350	2.62	10	0.01	NO	40
501PUL600	600.00	608.00	0.40	0.02	0.30	-	-	400	4.60	10	0.01	NO	40

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.